


CAMPBELL'S CONCRETE LTD.

420 MT. EDWARD ROAD, P.O. BOX 373 • CHARLOTTETOWN, P.E.I. C1A 7K7

C21.0

ABOVE GROUND PETROLEUM TANK CONTAINMENT CHAMBERS

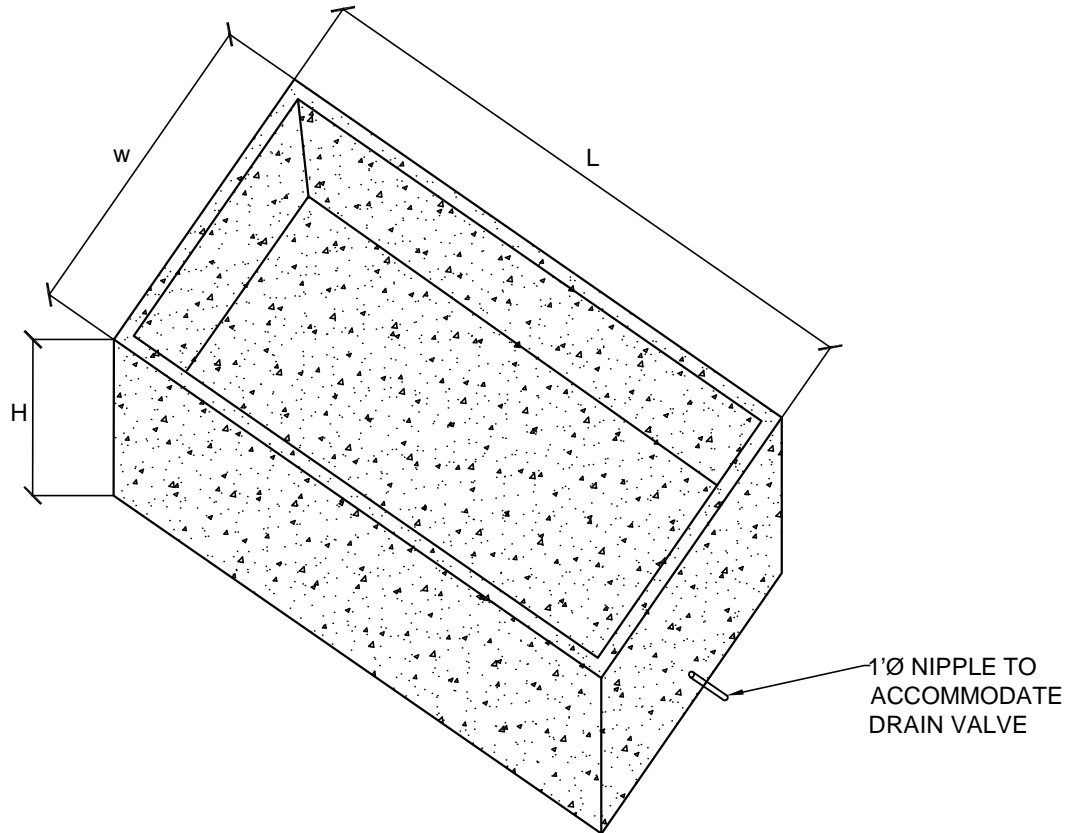

DESCRIPTION	OUTSIDE DIMENSIONS			THICKNESS		ACTUAL CAP.	WEIGHT
	H	W	L	WALL	FLOOR		
250 GAL BACKUP CONTAINER	2'-3"	4'-7"	8'-7"	2 1/2"	3 1/2"	410	2300
500 GAL BACKUP CONTAINER	2'-8 1/2"	7'-1"	10'-4"	4"	4"	860	7350
1100 GAL BACKUP CONTAINER	3'-4"	7'-10"	15'-3"	3 1/2"	5"	1650	12500
2000 GAL BACKUP CONTAINER	4'-1"	7'-10"	15'-3"	4"	5"	2200	14000

SPECIFICATIONS:
 APPROVED BY P.E.I GOVERNMENT DEPT OF ENVIRONMENT
 5000 psi AT 28 DAYS
 REINFORCING 10M REBAR 16" O/C ACROSS FLOOR AND UP SIDES IN BOTH DIRECTIONS
 AIR ENTRAINING 5-7%
 FIBRE MESH REINFORCING

NOTES: EXCELLENT PROTECTION FOR ABOVE GROUND INSTALLATIONS
 OPTIONAL 6"X 2 1/2" NAILING BLOCKS PLACED IN WALLS TO ACCOMMODATE WEATHER SHELTER. TOP SECTIONS AVAILABLE, SEE PAGE C23.0
 BELOW GROUND CONTAINERS ALSO AVAILABLE, SEE PAGE C22.0