

1500 IGAL SEPTIC TANK

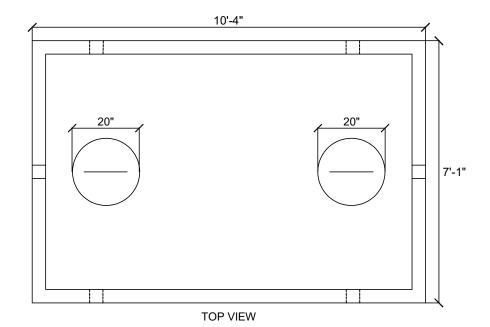

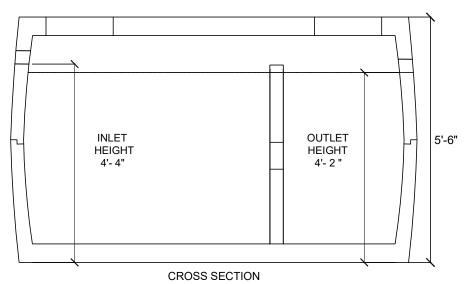

SPECIFICATIONS:
APPROVED BY PEI DEPT. OF ENVIRONMENT
5000 psi AT 28 DAYS
AIR ENTRAINING 5-7%
10mm REBAR REINFORCING
FIBRE MESH REINFORCING
MAXIMUM COVER IS 5 FEET

NOTES: - PARTITION WALL CONTAINS AN 8"X 8" OPENING CENTERED ON LIQUID LEVEL -PARTITION EXTENDS 1 $\frac{1}{2}$ " ABOVE LIQUID LEVEL

		OUTSIDE DIMENSIONS			THICKNESS						
DESCRIPTION	ITEM#	Н	W	L	WALL	FLOOR	TOP	INLET	OUTLET	WEIGHT	
1500 IGAL SEPTIC TANK	W2.401	5'-6"	7'-1"	10'-4"	3 1/2"	4"	4"	4'-6"	4'-4"	15800 LBS.	