

3000 IGAL SEPTIC TANK

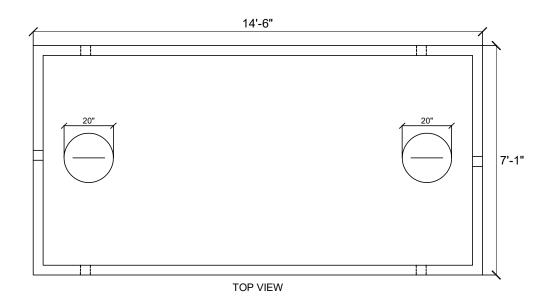

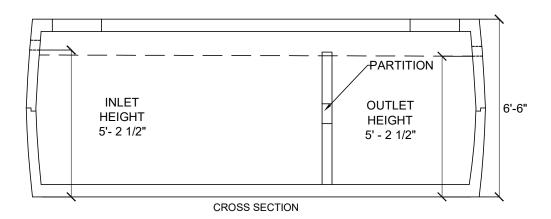

SPECIFICATIONS:
APPROVED BY PEI DEPT. OF ENVIRONMENT
5000 psi AT 28 DAYS
AIR ENTRAINING 5-7%
10mm REBAR REINFORCING
FIBRE MESH REINFORCING
MAXIMUM COVER IS 3 FEET

NOTES: - PARTITION WALL CONTAINS AN 8"X 8" OPENING CENTERED ON LIQUID LEVEL -PARTITION EXTENDS 1 $\frac{1}{2}$ " ABOVE LIQUID LEVEL

| | | OUTSIDE DIMENSIONS | | | THICKNESS | | | | | |
|-----------------------|--------|--------------------|-------|--------|-----------|-------|-----|-------|--------|------------|
| DESCRIPTION | ITEM# | Н | W | L | WALL | FLOOR | TOP | INLET | OUTLET | WEIGHT |
| 3000 IGAL SEPTIC TANK | W2 601 | 6'-6" | 7'-1" | 14'-6" | 4" | 5" | 5" | 5'-4" | 5'-2" | 27900 LBS. |