

4000 IGAL SEPTIC TANK

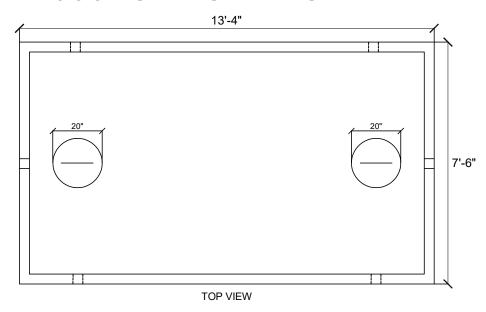

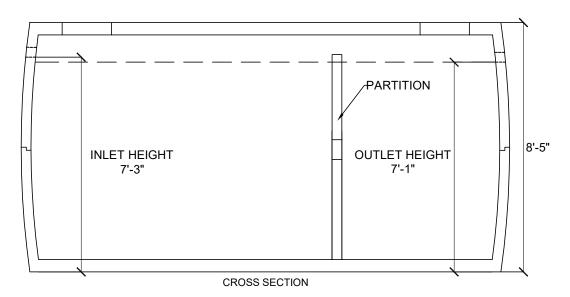

SPECIFICATIONS:
APPROVED BY PEI DEPT. OF ENVIRONMENT
5000 psi AT 28 DAYS
AIR ENTRAINING 5-7%
10mm REBAR REINFORCING
FIBRE MESH REINFORCING
MAXIMUM COVER IS 3 FEET

NOTES: - PARTITION WALL CONTAINS AN 8"X 8" OPENING CENTERED ON LIQUID LEVEL -PARTITION EXTENDS 1 $\frac{1}{2}$ " ABOVE LIQUID LEVEL

		OUTSIDE DIMENSIONS				THICKNESS				
DESCRIPTION	ITEM#	Н	W	L	WALL	FLOOR	TOP	INLET	OUTLET	WEIGHT
4000 IGAL SEPTIC TANK	W2.701	8'-5"	7'-6"	13'-4"	4"	5 1/2"	5 1/2"	7'-3"	7'-1"	32200 LBS.